




208 S Spresser St PO Box 376  
Taylorville, IL 62568  
800-7DOMINO 800-736-6466  
217-824-9441(T) 217-824- 3349(F)  
email: info@dominoengineering.com

## Installation Instructions for Res-Com 2000

**Nature of Operation:** The *Res-Com 2000* (RC2K) is designed to adapt standard residential, single-button radio controls for use with traditional three button commercial operators. Open, stop, and close functions are performed by a single button transmitter. Each press activates the operator, one function at a time, in rotation: up...stop...down...stop, etc.

**Installation:** The *Res-Com 2000* can be positioned or mounted near a three-button station or the operator. The Res-Com 2000 requires 24 VAC.

**Wiring Res-Com 2000:** The *Res-Com 2000* wires into the open, stop, and close circuits of the three button station (see diagram). Green wires connect to open and common of open circuit; blue wires connect to close and common of close circuit; and the red wires connect in series with the stop circuit (does **not** connect with common of stop). Each of the two black wires connect to a separate leg of the 24VAC which can be sourced from the 24 VAC transformer in the operator, or from a wall plug-in transformer such as Linear's 524-adaptor transformer.

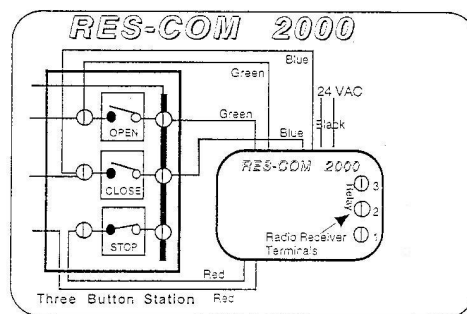

**Wiring Radio Receiver:** Any 24 VAC receiver can be used with the *Res-Com 2000*. Connect the three receiver terminals to the three *Res-Com 2000* terminals. Terminal 2 on the *Res-Com 2000* is the relay or sense input terminal.

**WARRANTY:** Domino Engineering Corporation will repair or replace at no charge any *Res-Com 2000* failing to operate properly for any reason, except physical abuse or excessive voltage, within a period of 12 months from date of purchase. In addition, Domino Engineering Corporation will repair or replace for \$25 any *Res-Com 2000* failing to operate properly for any reason, except physical abuse or excessive voltage, within the period of one to five years from date of purchase.